

Winchester 12 Ga. 2 3/4" 1 oz. Rifled Slug - Segmenting

Symbol: RA12RS15S – Winchester Ranger® Segmenting Rifled Slug Load

Shellcase: 12 Ga. 2 3/4" Brass Plated High Steel Head, Black Plastic Tube

Slug: 1 oz. (28 grams) 3 Segment Lead Hollow Point Rifled Slug

Powder: Clean burning, low flash

Primer: Winchester non-corrosive battery cup primer

Accuracy: 3.0 inches (7.6 cm) Extreme Spread - Product Mean

6.0 inches (15.2 cm) Extreme Spread - Maximum Average

3 x 5 shot groups at 40 yards (36.6 m) tested in improved cylinder choke barrel

Velocity: 1,585 ft/sec (483 m/s) nominal at 3 ft (0.9 m)


Fired in a 30 inch (76 cm) standard SAAMI test barrel

Energy: 2440 ft-lb (3308 joules) at 3 ft (.9m)

Pressure: 11,500 psi maximum average (793 bars)

Waterproofing: Applied to joint between primer cup and battery cup

NDMINAL DIMENSIONS SHOWN EXCEPT AS NOTED

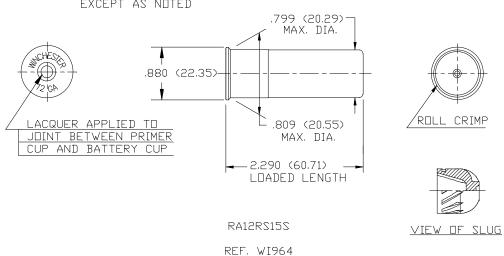

ECO31927

INFORMATION PUBLISHED HEREIN IS SUBJECT TO CHANGE AT MANUFACTURER'S DISCRETION WITHOUT NOTICE.